


## Double Girder Gantry Crane Cap.40~60t For Project

### 技术规格 Technical specifications

起重量 Cap	主钩 Main	t	40			60				
	副钩 Auxiliary		—			—				
跨度 Span		m	20	30	40	20	30	40		
起升高度 Lifting Height	主钩 Main		9			9				
	副钩 Auxiliary	—			—					
工作制度 Duty			A3			A3				
速度 Speed	主钩 Main	m/min	1			0.95				
	副钩 Auxiliary		—			—				
	小车运行 Crab travelling		10			10				
	大车运行 Trolley travelling		14			15				
极限尺寸 Limit dimension	L1	mm	3200		3800		3200		3800	
	L2		2100	500		2100	500			
	L		—			—				
	C1		1500			2000				
	C2		1500	2000		1500	2000			
主要尺寸 Main dimension	H	mm	14828			14828				
	H1		9000			9000				
	H2		—			—				
	H3		460			460				
	B		8286			8286				
	K		3000			3000				
	W		6000			6000				
最大轮压 Max.Wheel Loading		kN	175	190	220	240	260	280		
电机总功率 Power		kw	22.8		26		30			
荐用钢轨 Crane Rail Recommended			43Kg/m			43Kg/m				
电 源 Power Supply			三相交流 3-Phase A.C.50HZ 380V			三相交流 3-Phase A.C.50HZ 380V				

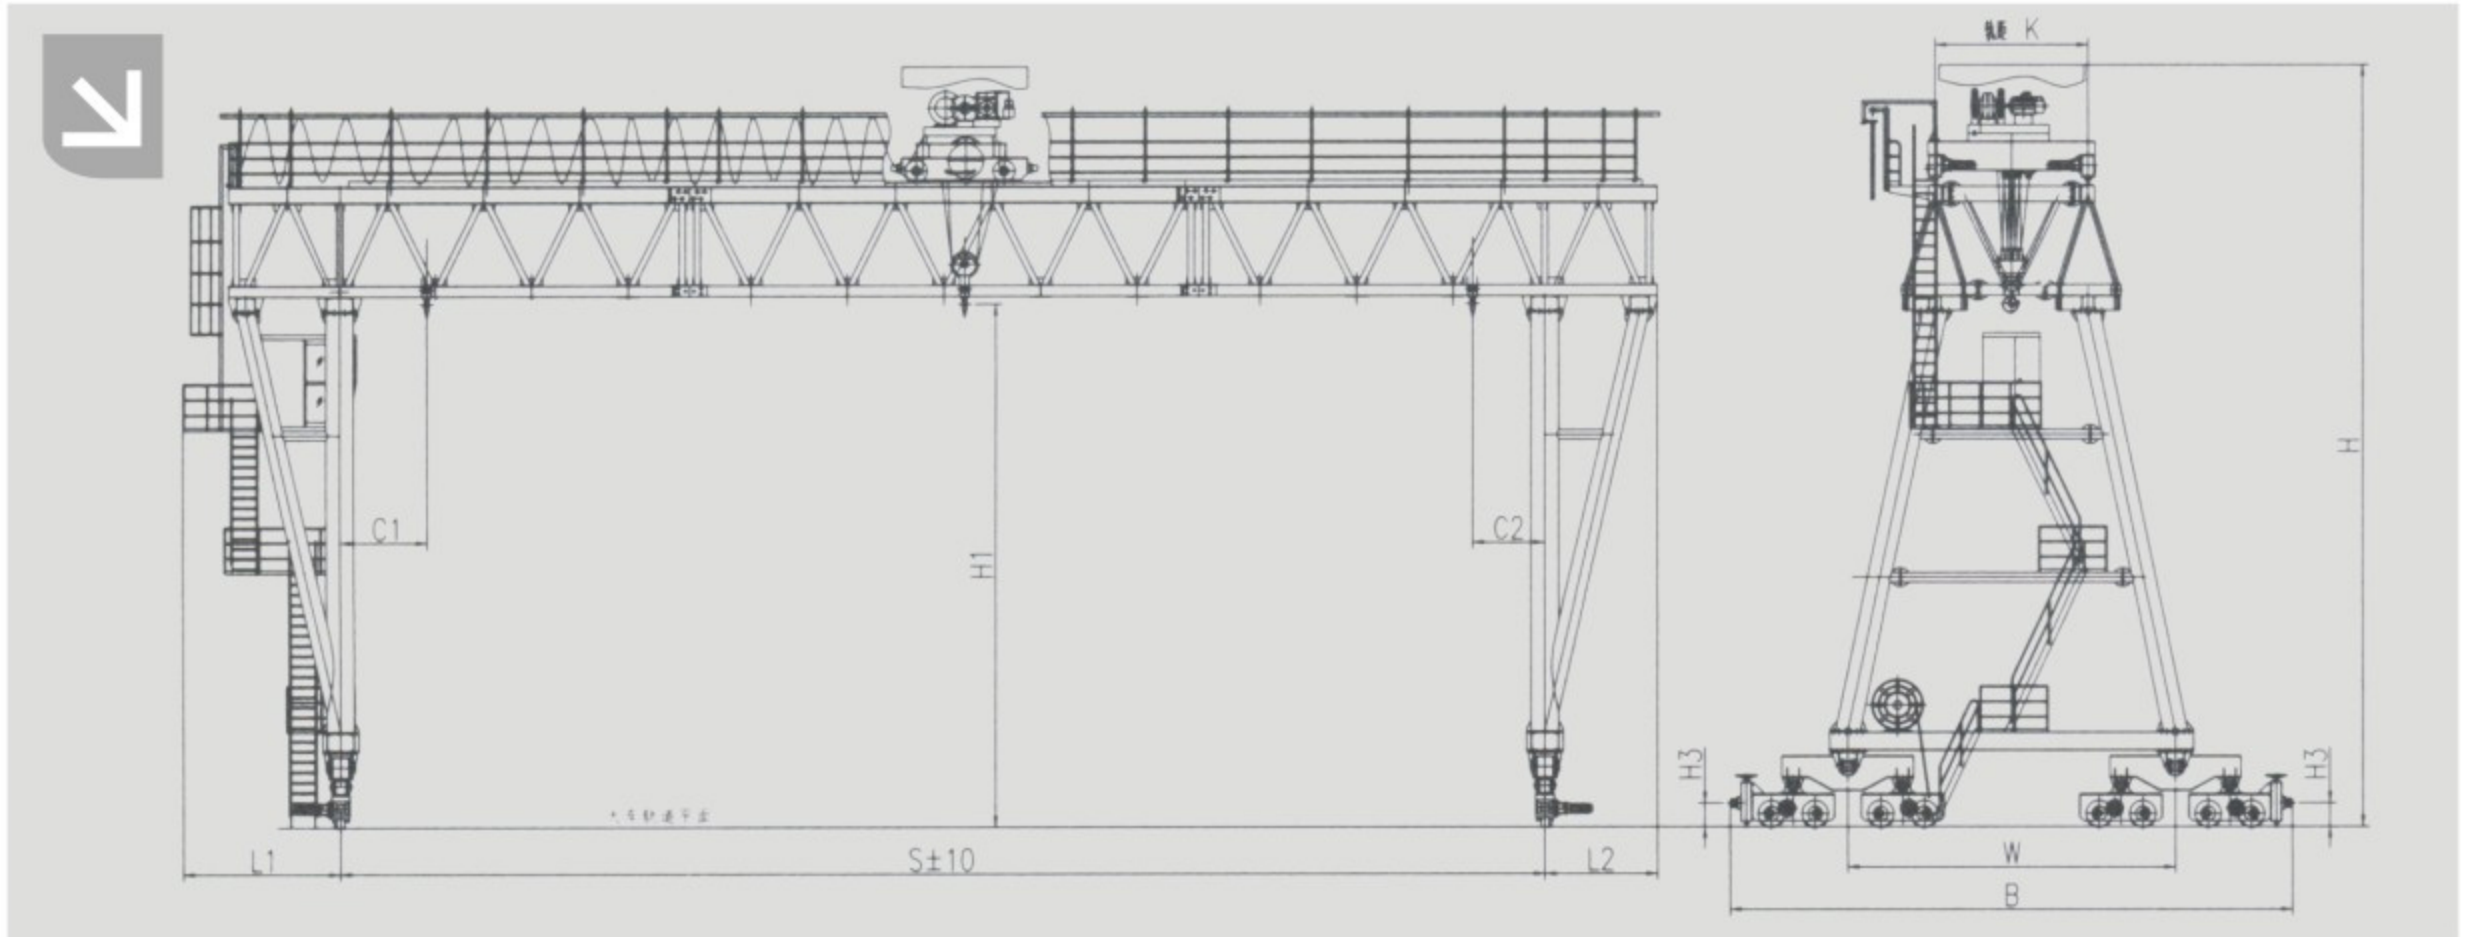

## Double Girder Gantry Crane Cap.80~100t For Project

### 技术规格 Technical specifications

起重量 Cap	主钩 Main	t	80		100	
	副钩 Auxiliary		—		—	
跨度 Span		m	20	30	20	30
起升高度 Lifting Height	主钩 Main		9	12		
	副钩 Auxiliary	—	—			
工作制度 Duty			A3		A3	
速度 Speed	主钩 Main	m/min	0.8		0.8	
	副钩 Auxiliary		—		—	
	小车运行 Crab travelling		10		10.5	
	大车运行 Trolley travelling		15		13	
极限尺寸 Limit dimension	L1	mm	3200		3500	
	L2		2100	500	2600	650
	L		—		—	
	C1		2000		2000	
	C2		2000		2000	
主要尺寸 Main dimension	H	mm	14828		17466	
	H1		9000		12000	
	H2		—		—	
	H3		460		540	
	B		8286		12876	
	K		3000		3500	
	W		6000		7500	
最大轮压 Max.Wheel Loading		kN	290	305	190	205
电机总功率 Power		kw	31.4		46.4	
荐用钢轨 Crane Rail Recommended			43Kg/m		43Kg/m	
电 源 Power Supply			三相交流 3-Phase A.C.50HZ 380V		三相交流 3-Phase A.C.50HZ 380V	